

(51) International Patent Classification <sup>6</sup> : D21H 23/32, 23/60		A1	(11) International Publication Number: WO 97/08385
			(43) International Publication Date: 6 March 1997 (06.03.97)
(21) International Application Number: PCT/US96/05445		(81) Designated States: BR, CA, FI, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 19 April 1996 (19.04.96)			
(30) Priority Data: 08/518,093      22 August 1995 (22.08.95)      US		Published With international search report.	
(71) Applicant: BELOIT TECHNOLOGIES, INC. [US/US]; Suite 3001, 3513 Concord Pike, Wilmington, DE 19803 (US).			
(72) Inventors: LI, Alfred, C.; 912 John Friend Drive, Naperville, IL 60540 (US). BECKER, Rex, A.; 1203 Hawthorne Road, Janesville, WI 53545 (US). BUSKER, Leroy, H.; 571 West Rockton Road, Rockton, IL 61072 (US).			
(74) Agent: ARCHER, David, J.; One St. Lawrence Avenue, Beloit, WI 53511 (US).			

A uniform film of coating is delivered onto a substrate such as paper, felts and blankets by a film applicator (20; 100; 120; 142) which has a static converging wedge (32; 88; 108; 128; 150), an adjustable converging wedge (33), and an extraction channel (45; 92; 112; 132; 154) located between the two wedges. As a unit, the film applicator minimizes the hydrodynamic flow instabilities, as well as reduces flow variations associated with a nonuniform feed and a dynamic contact line. The film applicator also removes entrained air and excess coating from the application zone in order to improve the flow stability and machine runnability.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**FILM APPLICATOR WITH ENTRAINED AIR REMOVAL AND SURFACE CONTROL****FIELD OF THE INVENTION**

The present invention relates to apparatus for applying coatings to moving substrates such as paper, applicator rolls, felts, and blankets.

**BACKGROUND OF THE INVENTION**

Paper of specialized performance characteristics may be created by applying a thin layer of coating material to one or both sides of the paper. The coating is typically a mixture of a fine plate-like mineral, typically clay or particulate calcium carbonate; coloring agents, typically titanium dioxide for a white sheet; and a binder which may be of the organic type or of a synthetic composition. In addition, rosin, gelatins, glues, starches or waxes may be applied to paper for sizing.

Coated paper is typically used in magazines, commercial catalogs and advertising inserts in newspapers and other applications requiring specialized paper qualities.

Coated ground-wood papers include the popular designation "lightweight coated" (LWC) paper. For lightweight coated paper, coating weight is approximately thirty percent of total sheet weight and these grades of paper are popular with magazine publishers, direct marketers, and commercial printers as the lighter weight paper saves money on postage and other weight-related costs. With the increasing demand for lighter weight, lower cost coated papers, there is an increasing need for more efficiency in the production of these paper grades.

Paper is typically more productively produced by increasing the speed of formation of the paper and coating costs are kept down by coating the

paper while still on the papermaking machine. Because the paper is made at higher and higher speeds and because of the advantages of on-machine coating, the coaters in turn must run at higher speeds. The need in producing lightweight coatings to hold down the weight of the paper and the costs of the coating material encourages the use of short dwell coaters for its superior runnability at high machine speeds.

Thus, high speed coater machines are key to producing lightweight coated papers cost-effectively.

Currently, coating applicators apply coating to the web in two separate manners. One is a direct application of a thin film by the coating applicator onto the moving web. The other is by application onto a transfer medium, i.e. an applicator roll, which then applies the thin film of fluid onto the web. Devices using either application approach may be classified as film applicators.

A typical film applicator has a coating pond which serves as an application zone. One of the boundary walls of the application zone is provided by the moving substrate, i.e. paper web or blanket supported by a backing roll, applicator roll, etc. Coating within the pond is effectively transferred onto the substrate. The substrate enters the pond through an overflow region where it makes initial contact with the coating fluid at the dynamic contact line. A boundary layer is rapidly established adjacent to the moving substrate as it propagates through the pond. The substrate exits the pond at a metering element. The pond provides a means for accelerating the coating fluid up to the speed of the moving substrate by allowing internal flow recirculation and attenuating the cross-machine direction flow variations by permitting overflow through the baffle. In general, the residence time is short for the substrate, but can be relatively long for the coating fluid.

The major problem associated with this type of film applicator is the appearance of uncontrollable, nonuniform cross-machine direction and machine direction coat weight distributions on the substrate as the machine speed exceeds some critical speed limit. This speed limit depends upon the flow geometry in the application zone and the rheological properties of the coating fluid. These non-uniformities exhibit a characteristic cross-machine length scale which appears to be proportional to the dimension characteristic of the active region where flow instabilities and disturbances take place.

Experimental data with a film applicator has revealed that the hydrodynamic instabilities induced by the presence of three-dimensional vortexes in the pond as well as flow disturbances created by the entrainment of air at the dynamic contact line and from the coating feed supply are important phenomena contributing to a nonuniform coat weight distribution. However, the relationship between these two phenomena is still unknown. When a fluid is driven away from its stable equilibrium mode due to a change in operating conditions, it will often undergo a sequence of instabilities, each of which leads to a change in the spatial or temporal structure in the flow. In the present case, hydrodynamic instabilities develop as a result of the coating fluid undergoing transitions of different dynamic regimes, such as shift from stable flow to an unstable flow as the Reynolds number (or machine speed) increases. The Reynolds number ( $Re$ ) may be defined as:

Where  $\rho$  is the density of the coating fluid,  $u$  is the characteristic velocity (substrate speed),  $L$  is the characteristic dimension of the active region where the state of flow undergoes different dynamic changes, and  $\eta$  is the apparent viscosity of the coating fluid. The stability of flow in the active region can influence the uniformity of velocity and pressure profiles that, in turn, affect the coat weight distribution on the substrate.

Although air entrainment has been the subject of research in a number of areas related to a moving substrate entering into or contacting with an unpressurized liquid system, it is apparent that even at a low machine speed, there is still a lack of fundamental understanding of how air is entrained at the dynamic contact line, how much air volume enters with the moving substrate, and where the entrained air goes. In general, any phenomenon observed at a low machine speed tends to be magnified and become even worse as the machine speed increases.

For the case of flow in a pressurized film applicator, the amount of air being entrained increases as the machine speed increases. At the same time, this same speed increase and the increased volume of air create flow disturbances in the coating pond, disrupting the uniformity of the velocity and pressure profiles as well as the desired boundary layer adjacent to the moving substrate. At lower machine speeds, most of the air is successfully displaced or removed via the overflow region. At faster machine speeds, however, an increasingly larger volume of air is forced out through the overflow or possibly underneath the metering blade. This combined action of flow instability and uncontrolled air removal results in the emergence of the coat weight variations on the substrate.

What is needed is a film applicator which is capable of operating consistently at high machine speeds and which minimizes coating defects.

### SUMMARY OF THE INVENTION

The high speed film applicator of this invention is comprised of a static converging wedge, an adjustable converging wedge, and an extraction channel located between the two wedges. The static and adjustable converging wedges, whose dimensions and angles may vary due to application, define a region of decreasing height beneath the substrate. The geometry bounded by the static converging wedge, the adjustable converging wedge and the substrate minimizes flow variations due to a nonuniform coating feed and a nonuniform dynamic contact line profile. Subsequently, a stable flow is generated within the application zone. The adjustable converging wedge controls the applied coat weight by adjusting the width of the coating application gap within the pond. An extraction zone is positioned between the static and adjustable wedges, and vents to an atmospheric or partial vacuum pressure region. Coating is withdrawn from the pond at the extraction zone which reduces the mean pressure level in the application zone as well as attenuating the cross machine flow variations. Additionally, the extraction process removes air entrained in the coating fluid which results in improved coating flow stability.

It is a feature of this invention to provide an apparatus which applies coatings to a substrate traveling at high speeds with minimal surface variations.

It is another feature of the present invention to provide a film applicator which is insensitive to variations in coating flow and paper run.

It is also a feature of the present invention to provide a high speed film applicator which may be readily configured for different paper stocks and coater chemistry.

It is an additional feature of the present invention to provide a film applicator which damps high frequency and low frequency flow variations to yield improved coating attributes.

Further objects, features and advantages of the invention will be apparent from the following detailed description when taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an isometric view of a high speed film coating applicator of this invention with a paper web proceeding therethrough.

FIG. 2 is a cross-sectional elevational view of the applicator of FIG. 1.

FIG. 3 is a schematic representation of an applicator of this invention having two solid wedges, the second wedge being adjustable, separated by an extraction path, and illustrated in a size applying embodiment.

FIG. 4 is a cross-sectional view of an alternative embodiment applicator of this invention having a dynamic wedge defined by a metal blade.

FIG. 5 is a cross-sectional view of another alternative embodiment applicator of this invention having an adjustable wedge with a rod arrangement.

FIG. 6 is a cross-sectional view of a further alternative embodiment applicator of this invention having an adjustable wedge defined by a rigid member with active loading and retracting structures.



### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring more particularly to FIGS. 1-6, wherein like numbers refer to similar parts, an applicator 20 for the application of coatings to a substrate moving at high speeds is shown in FIGS. 1 and 2. An uncoated substrate 36 passes through the applicator 20 for application of the desired surface coating. The applicator 20 has a coater head 22 which extends at least the width of the web and which is positioned beneath a backing roll 24. The coater head 22 has a rigid housing 23 which extends in the cross-machine direction and which defines an application chamber for applying coating to the substrate 36. The housing 23 has an inlet 26 through which coating 34 is introduced to a pond 28 formed between a forward baffle plate 30 and an inclined static application wedge 32 and an adjustable application wedge 33. The region where coating is applied to the substrate is known as the application zone. Coating 34 is introduced under pressure from the inlet 26 to an inlet channel 27. The channel 27 is defined between the overflow baffle plate 30 and the static wedge 32, and preferably has a channel width of one-eighth to one-quarter inch. The depth of the channel is preferably from four to eight inches. The feed rate of the coating is preferably from one to four gallons-per-minute per cross-direction-inch.

The coating 34 is applied from the pond 28 to the substrate 36 which passes between the backing roll 24 and the coater head 22. A gap 38 is defined between the upper lip 40 of the baffle plate 30 and the substrate 36. The coating 34 overflows the baffle plate 30 and is allowed to escape the pond 28 through the gap 38. The gap 38 is between one-sixteenth and three-sixteenths of an inch high, and preferably about one-eighth of an inch high. The gap is used to vary the mean pressure in the pond, as well as to decrease the amount of air which is brought by the boundary layer of the substrate 36 into the pond 28. The overflow or flood of coating 34 which

flows through the gap 38 displaces a portion of the air boundary layer. The overflow then flows into a trough 42 which is positioned upstream of the baffle plate 30. The overflowing coating 34 is collected in the trough 42 and recycled. A dynamic contact line 44 is formed where the coating 34 displaces the boundary layer of air adjacent to the substrate.

As shown in FIG. 2, the static wedge 32 is fixed to the housing 23 to present a constant inclined surface to the moving substrate 36. The static wedge 32 begins at the coating inlet 26 and extends upstream to an extraction zone channel 45 defined between the static wedge 32 and the adjustable wedge 33. The extraction channel 45 is preferably between zero and one-quarter inch in width, and is from one-half inch to five inches deep. The static wedge has a converging angle of up to fifteen degrees, and is preferably between three and fifteen degrees. The length of the static wedge 32 in the machine direction should be between one inch and five inches.

The adjustable converging wedge 33 is mounted downstream of the static wedge 32 and is resiliently mounted to the housing 23 for controlled movement toward and away from the moving substrate 36. The housing 23 has upstream and downstream restraining walls 46 which extend toward the substrate 36 on either side of the adjustable wedge 33. The restraining walls 46 do not extend above the upper surface 48 of the adjustable wedge 33. Two O-rings 50 are positioned between the sidewalls 52 of the adjustable wedge 33 and the housing restraining walls 46 to prevent flow therebetween.

The adjustable wedge 33 is supported on two inflatable members or air tubes 54 which extend in a cross-machine direction and which are loaded to achieve the desired application gap 56 between the downstream edge of the adjustable wedge 33 and the substrate 36. The application gap 56 is preferably between 0.001 inches and 0.100 inches. One or more springs 58 or

other resilient means extend between the housing 23 and the adjustable wedge 33 to bias the adjustable wedge toward the housing. The adjustable wedge 33 is rigid in the cross-machine direction and is restrained in the machine direction. The loading of the air tubes 54 also holds the adjustable wedge 33 in a substantially constant vertical position with respect to the substrate 36, although a slight resilience in the loaded air tubes 54 may allow the wedge to cancel out vibrations in the machine. The air tubes 56 provide means for positioning the adjustable wedge member to adjust the height of the application gap.

Experiments have indicated that as the size of the application gap 56 increases, the flow uniformity through the gap becomes more responsive to changes in machine speed. The adjustable converging wedge 33 contributes to the development of a flow regime which approximates stable two-dimensional coating flow, thereby controlling the coat weight on the substrate. Through proper positioning of the adjustable wedge 33, the applicator 20 may be adjusted both between runs and on the run to obtain coating of consistent quality. If, for example, variations occur in the coating uniformity on the substrate during a run, it will be possible for an operator or an automatic controller to adjust the position of the adjustable wedge 33 to allow a greater or lesser flow rate of coating past the adjustable wedge. The final desired coat weight may be adjusted by controlling the pressure in the air tube 63 behind the metering blade 62.

The extraction zone channel 45 has a channel gap between the static wedge 32 and the downstream restraining wall 46 which may be up to one-quarter inch wide, and is preferably about one-eighth inch wide. The depth of the extraction zone channel 45 should be between one-half and five inches. The extraction zone channel 45 is connected to a recirculation chamber 60 or other region which is maintained at atmospheric pressure

levels, or preferably the recirculation chamber is maintained at a pressure which may be above atmospheric but which is below the pressure levels experienced in the pond 28. The extraction zone is driven primarily by the pressure difference between the application zone and the atmosphere, and serves to eliminate a portion of the air entrained in the coating fluid for improving the flow stability. The extraction zone also serves to remove the excess coating within the pond 28 for minimization of the magnitude of the flow variations within the application, and for reduction of the mean pressure level in the application zone to enhance the applicator runnability.

Optionally, if application conditions require, a metering blade 62 may be provided to engage against the coated substrate 36 downstream of the adjustable wedge 33. Depending on the application, other metering devices, rods, air knives, etc., can also be used. The heavily coated substrate 36 passes over the metering blade 62 where the majority of the coating is scraped away leaving a uniform layer of coating on the substrate. The removed coating 34 may be collected and recirculated. An air tube 63 extends between the housing 23 and the metering blade 62 and allows for control of the position of the metering blade with respect to the substrate 36. The coated substrate 36 then leaves the backing roll 24 and passes over a turning roll 78 and enters a dryer section (not shown).

The applicator 20 is thus provided with structure which contributes to a determined and predictable flow of coating. By limiting the coating flow to a two-dimensional type flow as far as possible, the vortexes and other flow disturbance effects which mar consistent coating are minimized. In general, the applicator reduces the capacity for the fluid flow to determine its own flow path, but constrains the coating to flow along a desired route.

An alternative embodiment film applicator 80 is shown schematically

## 11

in FIG. 3. The film applicator 80 illustrates a size applying embodiment of the applicator of this invention. The applicator 80 has size roll 81, to which the coating is directly applied, and a backing roll 82 over which the web 36 is guided. A coater head 84 has a housing 86 to which is mounted a static wedge 88 which is spaced from an adjustable wedge 90 to define an extraction zone channel 92. The static wedge 88 and adjustable wedge 90 may be similar to those of the applicator 20. The adjustable wedge 90 is shown schematically as a block, to indicate that a variety of adjustable wedge mechanisms, such as those described below, may be employed. In FIG. 3, the adjustable wedge can vary the gap width with proper control mechanisms. Coating is transferred from the size roll to the web 36 guided by the backing roll. The applicator 80 has a valve, or other means for restricting the flow 94 which is positioned beneath the extraction zone channel 92. By opening or closing the flow restricting means 94, the flow rate from the extraction zone channel 92 may be controlled. Closing of the flow restricting means 94 will reduce the outflow of coating from the pond 98. Opening the flow restricting means will increase the outflow of coating. The flow restricting means may be a member which is movable toward and away from the channel 92 to adjust the flow characteristics.

Alternative adjustable wedge structures are shown in the applicators of FIGS. 4-6. The alternative embodiment applicator 100, shown in FIG. 4, has a backing roll 102 and a coater head 104 with a housing 106 positioned beneath the backing roll 102. A static wedge 108 is fixed to the housing 106, and an adjustable wedge 110 is spaced downstream from the static wedge 108 and is separated from the static wedge by an extraction zone channel 112. The adjustable wedge 108 is comprised of a flexible metal blade 114 which is fixed at one end to a post 116, and which is deflectable by an inflatable tube 118. The blade 114 is either in a low angle mode or a bent

mode. The blade functions as an adjustable wedge and is adjustable by selected pressurization of the tube 118 to meet coating requirements.

Another alternative applicator 120 is shown in FIG. 5. The applicator 120 has a backing roll 122 and a coater head 124 with a housing 126 positioned beneath the backing roll 122. A static wedge 128 is fixed to the housing 126, and an adjustable wedge 130 is spaced downstream from the static wedge 128 and is separated from the static wedge by an extraction zone channel 132. The adjustable wedge 130 is comprised of a stationary or rotatable roller 134 mounted to a support 136 which is pivotably mounted at its upstream edge to a post 138. The roller may be forward or reverse rotating, and may be either smooth or provided with circumferential grooves. The diameter of the roller 134 is preferably between three-eighths of an inch and two inches in diameter. The support 136 is backed by an inflatable tube 140 which is filled to a desired loading level. The tube 140 is sealed and is expanded with increased pressure in the tube to thereby decrease the gap between the roller 134 and the substrate 36.

Yet another alternative embodiment applicator 142 is shown in FIG. 6. The applicator 142 has a backing roll 144 and a coater head 146 with a housing 148 positioned beneath the backing roll 144. A static wedge 150 is fixed to the housing 148, and an adjustable wedge 152 is spaced upstream from the static wedge 150 and is separated from the static wedge by an extraction zone channel 154. The adjustable wedge 152 is comprised of a rigid plate 156 which is pivotably mounted to a post 158. The plate may be planar or, as shown, may have a slight curve formed therein. The plate may be convex toward the substrate to promote smooth flow thereover. A control mechanism 160, shown schematically, is any conventional position control mechanism for adjustably positioning the plate at a desired angle. The control mechanism has sophisticated loading and retracting mechanisms,

## 13

and may be responsive to sensors to position the rigid plate 156 at a desired angle. The control mechanism may be pneumatic or hydraulic actuators, piezoelectric actuators, electrically adjustable ferrous iron actuators, linkage actuators or other control mechanisms.

It should be noted that, in certain applications, it may be desirable to close up the extraction zone channel entirely where extraction of entrained air and excess coating is not required, for example where machine speed is low, or where coating formulations with low solids content or low viscosity levels are employed. Furthermore, although the apparatus of this invention has been illustrated in a web coating application, a similar apparatus may be employed for coating an application roll in a size press application.

It is understood that the invention is not limited to the particular construction and arrangement of parts herein illustrated and described, but embraces such modified forms thereof as come within the scope of the following claims.

We claim:

1. A coater apparatus for applying coating material to a substrate guided by a backing roll, said apparatus comprising:
  - a coater head housing (23) disposed in close proximity to the backing roll (24) such that the substrate (36) guided by the backing roll (24) moves between the backing roll (24) and the head housing (23), wherein the housing (23) defines an application chamber which opens toward the substrate and which extends along the substrate in a cross-machine direction, and wherein the application chamber receives and retains coating material in a coating pond (28), and wherein the application chamber is connected to a source of coating material;
  - portions of the coater head housing (23) which define a baffle plate (30) upstream of the application chamber, wherein the baffle plate has portions defining a lip spaced from the backing roll (24), and wherein excess coating material within the application chamber overflows the baffle plate lip to escape the application chamber; a static wedge member (32) which is fixed to the housing and which defines an application region between the member and the substrate, wherein the static wedge member (32) has an application surface which more closely approaches the substrate as the static wedge member extends downstream, and wherein the application surface is substantially fixed with respect to the housing; and
  - an adjustable wedge member (33) which is connected to the housing within the pond downstream of the static wedge member, wherein the adjustable wedge member (33) has an application surface which more closely approaches the substrate as it extends downstream defining an application gap of a variable height between the substrate and the application surface, and wherein



## 15

the adjustable wedge member application surface is resiliently connected to the housing.

2. The apparatus of Claim 1 wherein the static wedge member has a converging angle of between three and fifteen degrees.
3. The apparatus of Claim 1 wherein the static wedge member has a length in the machine direction of between one inch and five inches.
4. The apparatus of Claim 1 wherein the adjustable wedge member has a converging angle of between three and fifteen degrees.
5. The apparatus of Claim 1 wherein the adjustable wedge member has a length in the machine direction of between one inch and five inches.
6. The apparatus of Claim 1 further comprising a low pressure chamber retained at a pressure below that of the coating within the pond, wherein the low pressure chamber connects with the coating pond through an extraction zone channel defined between the static wedge member and the adjustable wedge member, and wherein air and excess coating are drawn out of the pond to the low pressure chamber.
7. The apparatus of Claim 6 wherein the extraction channel has a width in the machine direction of between zero and one-quarter inch and a depth of between one-half inch and five inches.
8. The apparatus of claim 6 further comprising means for restricting the flow positioned beneath the extraction zone channel between the static wedge member and the adjustable wedge member, wherein the flow restricting

means selectably controls the flow rate of coating drawn through the extraction zone channel.

9. The apparatus of Claim 1 further comprising:  
an upstream wall extending from the housing;  
a downstream wall extending from the housing, wherein the adjustable wedge member is engaged between the upstream wall and the downstream wall for movement toward and away from the substrate; and  
at least one inflatable member which extends between the housing and the adjustable wedge, wherein the inflatable member may be inflated to position the adjustable wedge as desired.
10. The apparatus of Claim 1 wherein the adjustable wedge member comprises:  
an application blade connected at one end to the housing; and  
an inflatable member extending between the housing and the application blade, wherein the inflatable member may be adjusted to position the application blade as desired.
11. The apparatus of Claim 10 wherein an application roller is mounted to the application blade and extends in a cross-machine direction, the roller being engageable with the moving substrate.
12. The apparatus of Claim 11 wherein the application roller is rotatably mounted to the application blade.
13. The apparatus of Claim 11 wherein the application roller is fixed to the application blade.

## 17

14. The apparatus of Claim 11 wherein the application roller has portions defining circumferential grooves.
15. The apparatus of Claim 11 wherein the roller has a diameter between three-eighths of an inch and two inches.
16. The apparatus of Claim 11 wherein the roller rotates in a downstream direction.
17. The apparatus of Claim 11 wherein the roller rotates in an upstream direction.
18. The apparatus of Claim 1 wherein the adjustable wedge member comprises:  
a rigid member having an application surface; and  
means for positioning the rigid member with respect to the housing.
19. The apparatus of Claim 18 wherein the application surface is convex toward the substrate.
20. The apparatus of Claim 1 further comprising a metering element which engages the coated substrate downstream of the adjustable wedge member and removes a portion of the coating thereon.
21. The apparatus of Claim 1 wherein the coating is fed to the application pond at a location upstream of the static wedge member.
22. *A coater for applying coating material to a substrate, the coater comprising:*

18

- a backing roll which engages the substrate to be coated;
  - a coater head housing closely spaced from the substrate and the backing roll, wherein the housing defines an application chamber which opens toward the substrate and which extends along the substrate in a cross-machine direction, and wherein the coating is fed under pressure to the housing into a coating pond;
  - a static wedge member fixed to the coater housing within the pond, wherein the application member extends toward the substrate to define a wedge-shaped region of the application chamber;
  - an adjustable wedge member which is connected to the housing within the pond downstream of the static wedge member, wherein the adjustable wedge member has an application surface which more closely approaches the substrate as it extends downstream defining an application gap of a variable height between the substrate and the application surface;
  - means for positioning the adjustable wedge member to adjust the height of the application gap;
  - an extraction zone channel defined between the static wedge member and the adjustable wedge member; and
  - portions of the housing which define a low pressure region maintained at a pressure below that of the coating within the pond, wherein entrained air and coating within the pond are drawn through the extraction zone channel into the low pressure region.
23. The apparatus of claim 22 further comprising means for restricting flow positioned beneath the extraction zone channel between the static wedge member and the adjustable wedge member, wherein the flow restricting means controls the flow rate of coating drawn through the extraction zone channel.

## 19

24. The apparatus of Claim 22 further comprising:  
an upstream wall extending from the housing; and  
a downstream wall extending from the housing, wherein the adjustable wedge member is engaged between the upstream wall and the downstream wall for movement toward and away from the substrate; and wherein the means for positioning the adjustable wedge member comprises at least one inflatable member which extends between the housing and the adjustable wedge, wherein the inflatable member may be inflated to position the adjustable wedge as desired.
25. The apparatus of Claim 22 wherein the adjustable wedge member comprises an application blade connected at one end to the housing, and wherein the means for positioning comprises an inflatable member extending between the housing and the application blade, wherein the inflatable member may be adjusted to position the application blade as desired.
26. The apparatus of Claim 25 wherein an application roller is mounted to the application blade and extends in a cross-machine direction, the roller being engageable with the moving substrate.
27. The apparatus of Claim 22 further comprising a metering blade which engages the coated substrate downstream of the adjustable wedge member and removes a portion of the coating thereon.
28. The apparatus of Claim 22 wherein the coating is fed to the application pond at a location upstream of the static wedge member.

## 20

29. The apparatus of Claim 22 wherein the width in the machine direction of the extraction zone channel is up to one quarter of an inch, and has a depth of between one-half and five inches.

30. A coater apparatus for applying coating material to a substrate guided by a backing roll, said apparatus comprising:

a coater head housing disposed in close proximity to the backing roll such that the substrate guided by the backing roll moves between the backing roll and the head housing, wherein the housing defines an application chamber which opens toward the substrate and which extends along the substrate in a cross-machine direction, and wherein the application chamber receives and retains coating material in a coating pond, and wherein the application chamber is connected to a pressurized source of coating material;

portions of the coater head housing which define a baffle plate upstream of the application chamber, wherein the baffle plate has portions defining a lip spaced from the backing roll, and wherein excess coating material within the application chamber overflows the baffle plate lip to escape the application chamber;

a static wedge member which is fixed to the housing and which defines an application region between the member and the substrate, wherein the static wedge member has a surface which more closely approaches the substrate as the static wedge member extends downstream, and wherein said surface is substantially fixed with respect to the housing;

an adjustable wedge member which is connected to the housing within the pond downstream of the static wedge member, wherein the adjustable wedge member has an application surface which more closely approaches the substrate as it extends downstream

defining an application gap of a variable height between the substrate and the application surface; and  
means for adjusting the position of the adjustable wedge member to control the height of the application gap.

31. The apparatus of Claim 30 further comprising a low pressure chamber retained at a pressure below that of the coating within the pond, wherein the low pressure chamber connects with the coating pond through an extraction zone channel defined between the static wedge member and the adjustable wedge member, and wherein air and excess coating are drawn out of the pond to the low pressure chamber.

32. A coater apparatus for applying coating material to a substrate guided by a backing roll, said apparatus comprising:

a coater head housing disposed in close proximity to a first roll which defines a nip with the backing roll such that the substrate guided by the backing roll moves through the nip between the backing roll and the first roll, wherein the housing defines an application chamber which opens toward the first roll and which extends along the first roll in a cross-machine direction, and wherein the application chamber receives and retains coating material in a coating pond, and wherein the application chamber is connected to a pressurized source of coating material;

portions of the coater head housing which define a baffle plate upstream of the application chamber, wherein the baffle plate has portions defining a lip spaced from the backing roll, and wherein excess coating material within the application chamber overflows the baffle plate lip to escape the application chamber;

a static wedge member which is fixed to the housing and which defines an application region between the member and the first roll,

wherein the static wedge member has an application surface which more closely approaches the first roll as the static wedge member extends downstream, and wherein the application surface is substantially fixed with respect to the housing; and an adjustable wedge member which is connected to the housing within the pond downstream of the static wedge member, wherein the adjustable wedge member has an application surface which more closely approaches the first roll as it extends downstream defining an application gap of a variable height between the first roll and the application surface, and wherein the adjustable wedge member application surface is resiliently connected to the housing.

33. A coater for applying coating material to a substrate, the coater comprising:
- a backing roll which engages the substrate to be coated;
  - a coater head housing closely spaced from the backing roll, wherein the housing defines an application chamber which opens toward the backing roll and which extends in a cross-machine direction, and wherein the coating is fed under pressure to the housing into a coating pond;
  - a static wedge member fixed to the coater housing within the pond, wherein the application member extends toward the backing roll to define a wedge-shaped region of the application chamber;
  - an adjustable wedge member which is connected to the housing within the pond downstream of the static wedge member, wherein the adjustable wedge member has an application surface which more closely approaches the backing roll as it extends downstream defining an application gap of a variable height between the substrate and the application surface;



23


means for positioning the adjustable wedge member to adjust the height of the application gap;

an extraction zone channel defined between the static wedge member and the adjustable wedge member; and

portions of the housing which define a low pressure region maintained at a pressure below that of the coating within the pond, wherein entrained air and coating within the pond are drawn through the extraction zone channel into the low pressure region.

34. The apparatus of Claim 33 further comprising a second roll which engages the substrate against the backing roll to define a nip which is spaced from the coater head, and wherein coating is applied from the coating pond to the backing roll, and from the backing roll to the substrate at the nip.

1/6

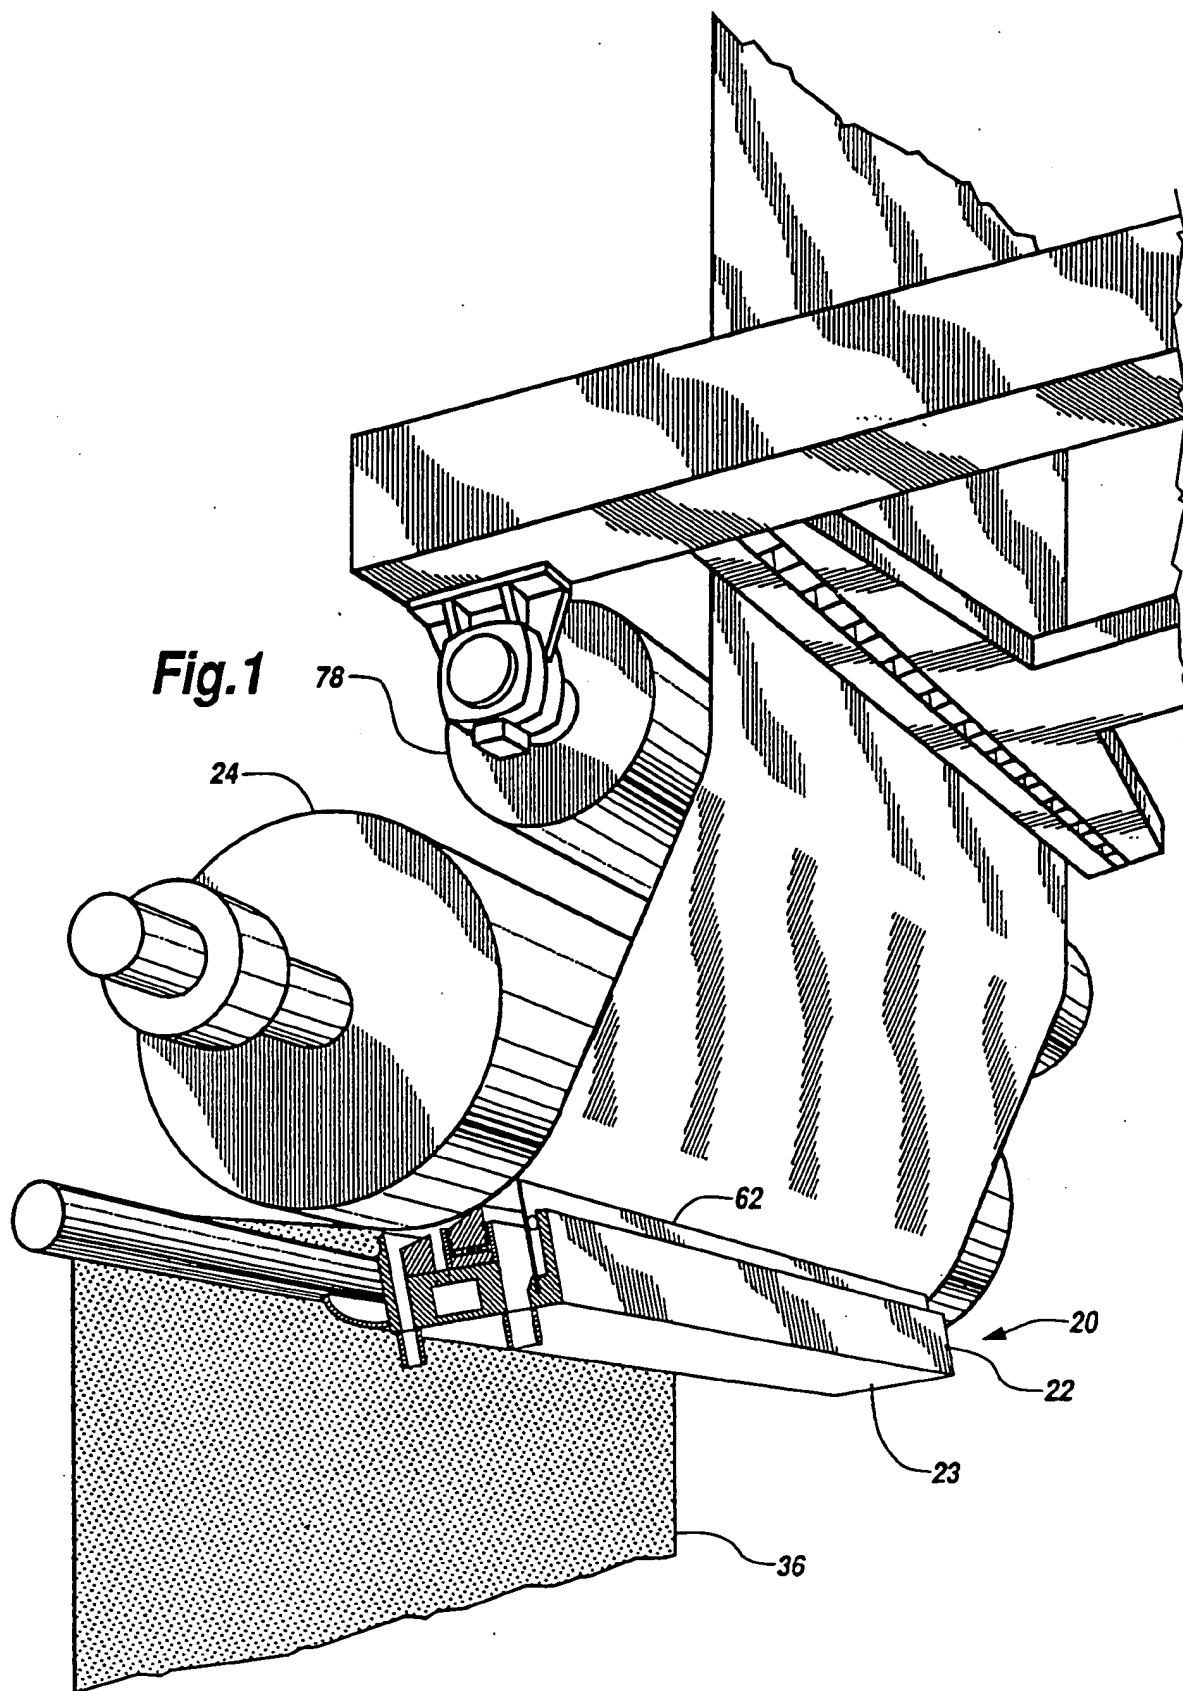

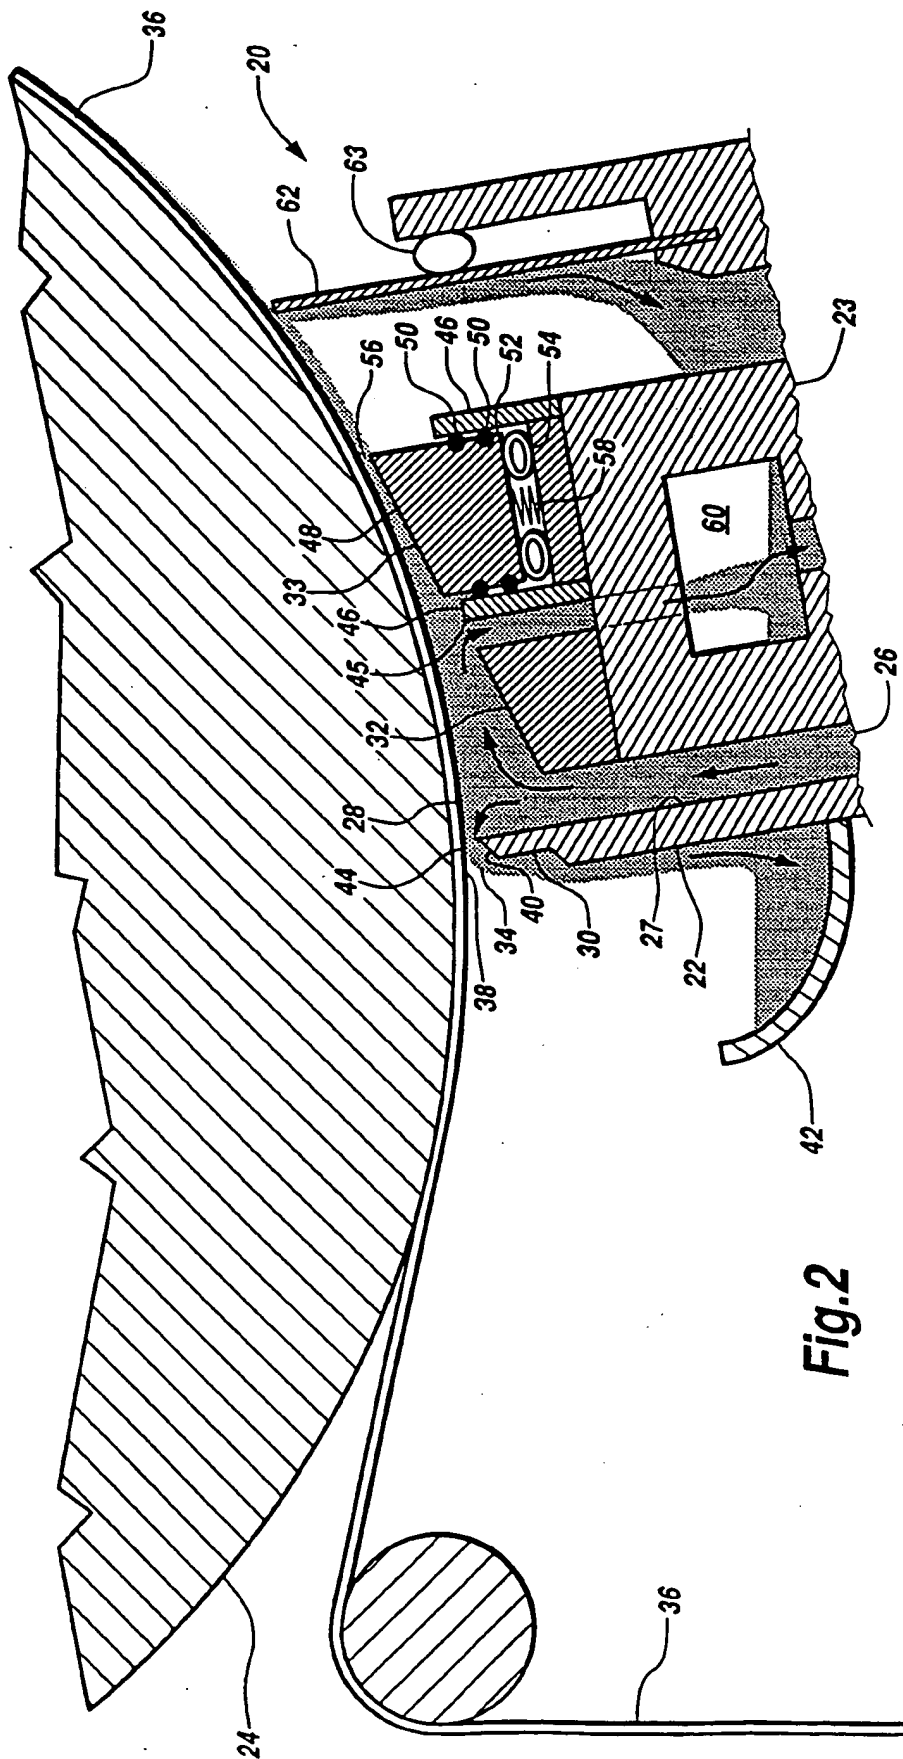


Fig. 2

3/6

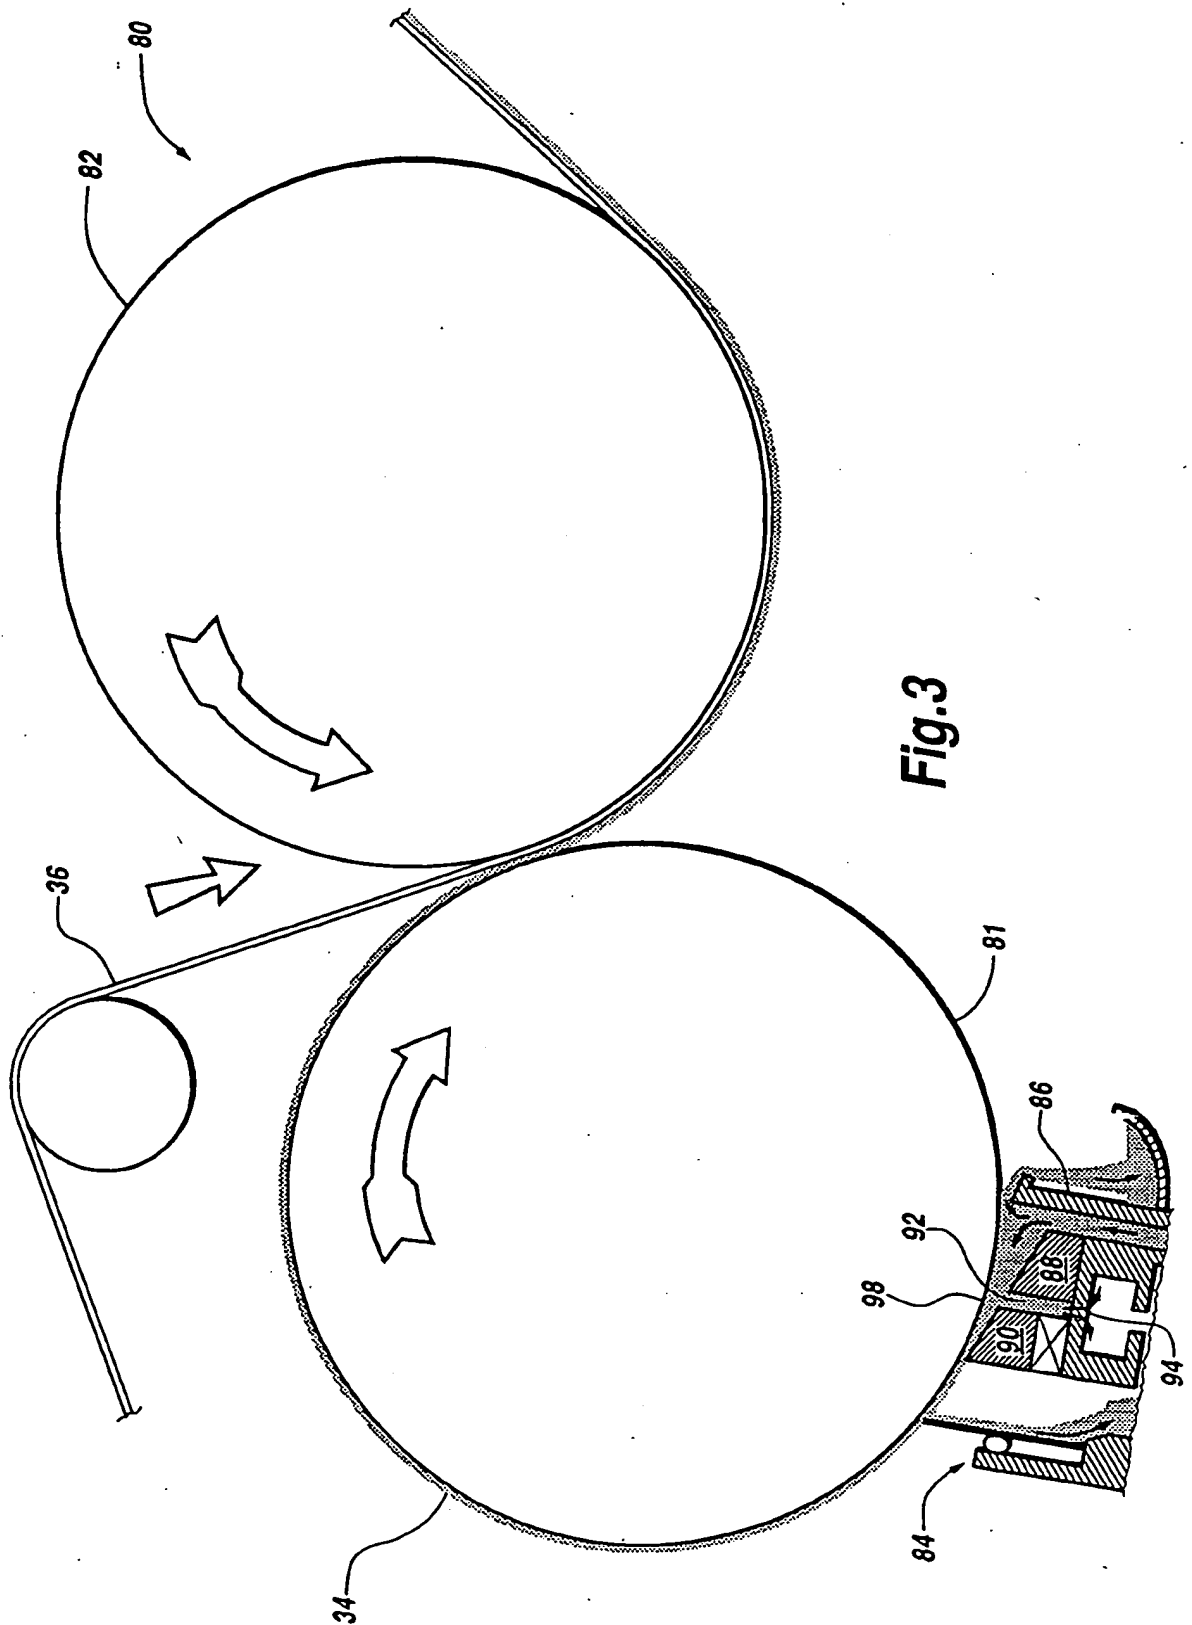


Fig.3

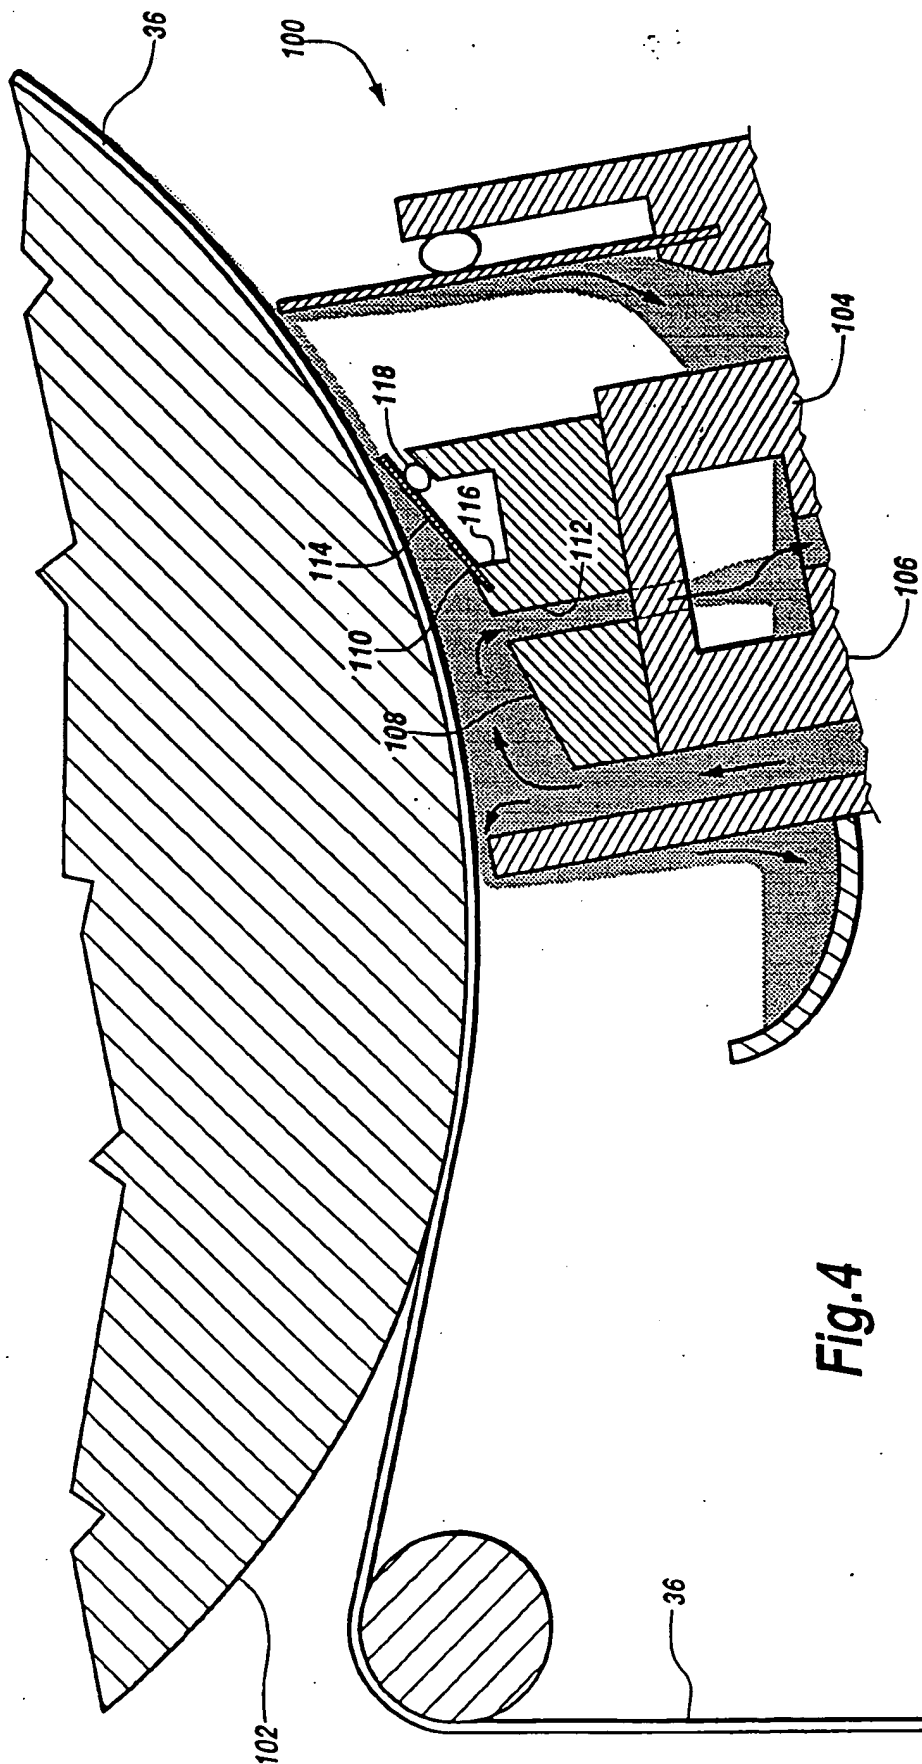


Fig. 4


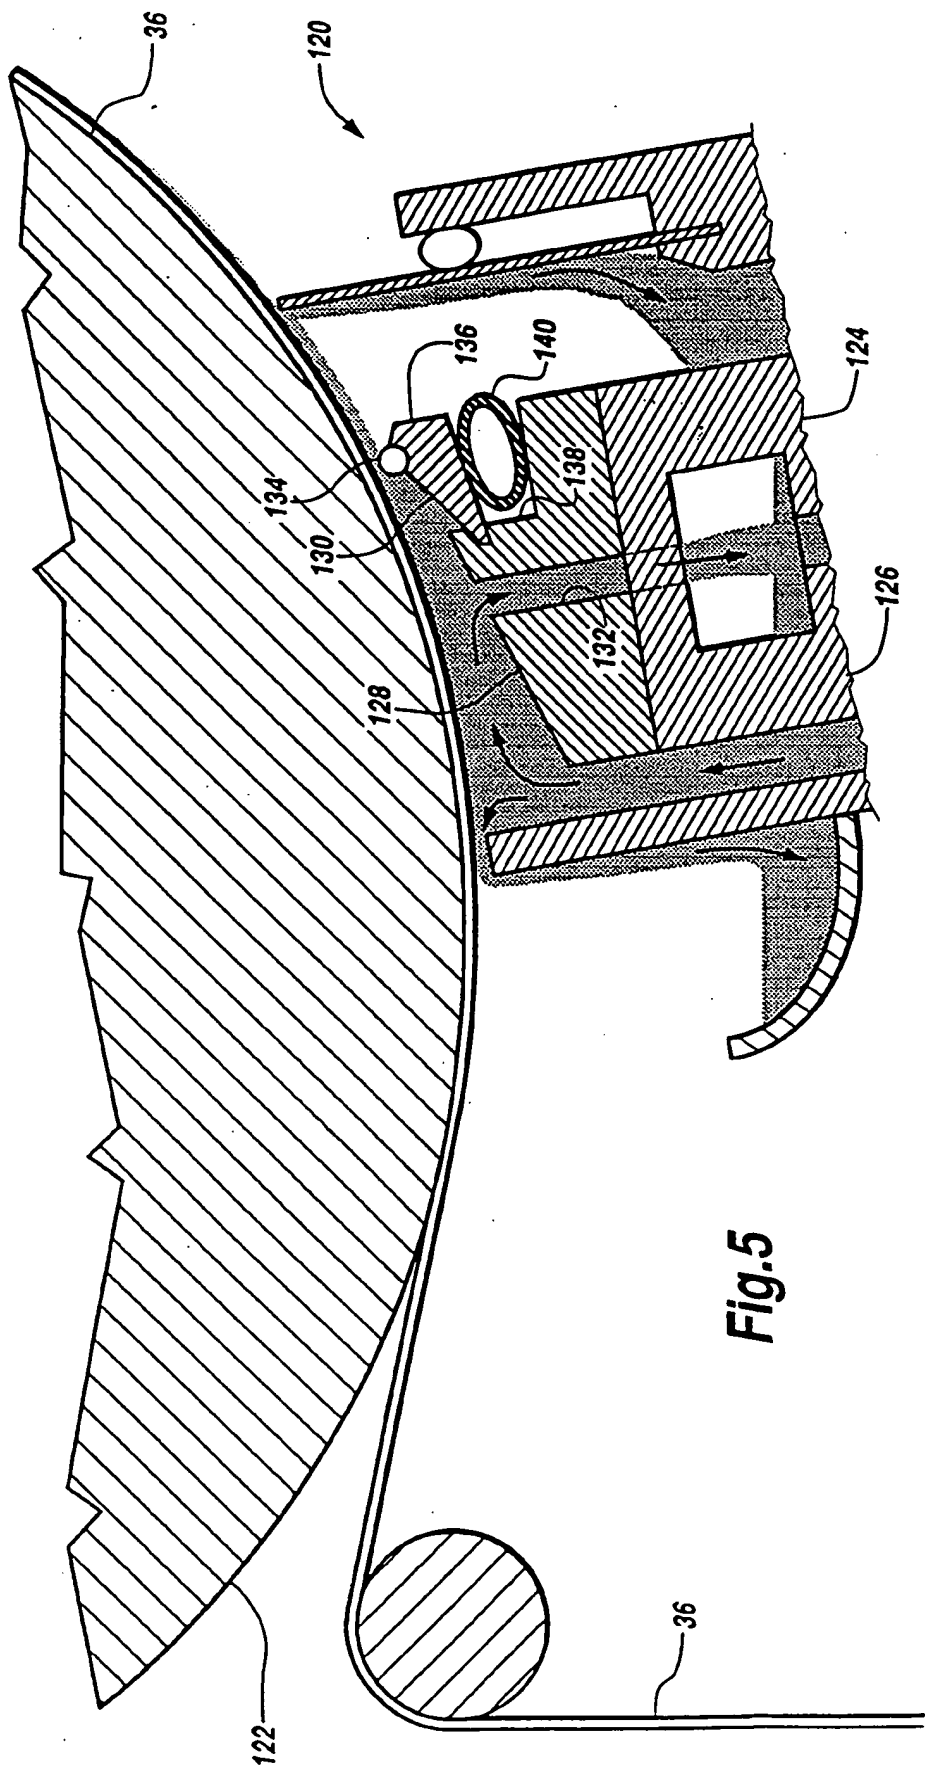


Fig. 5

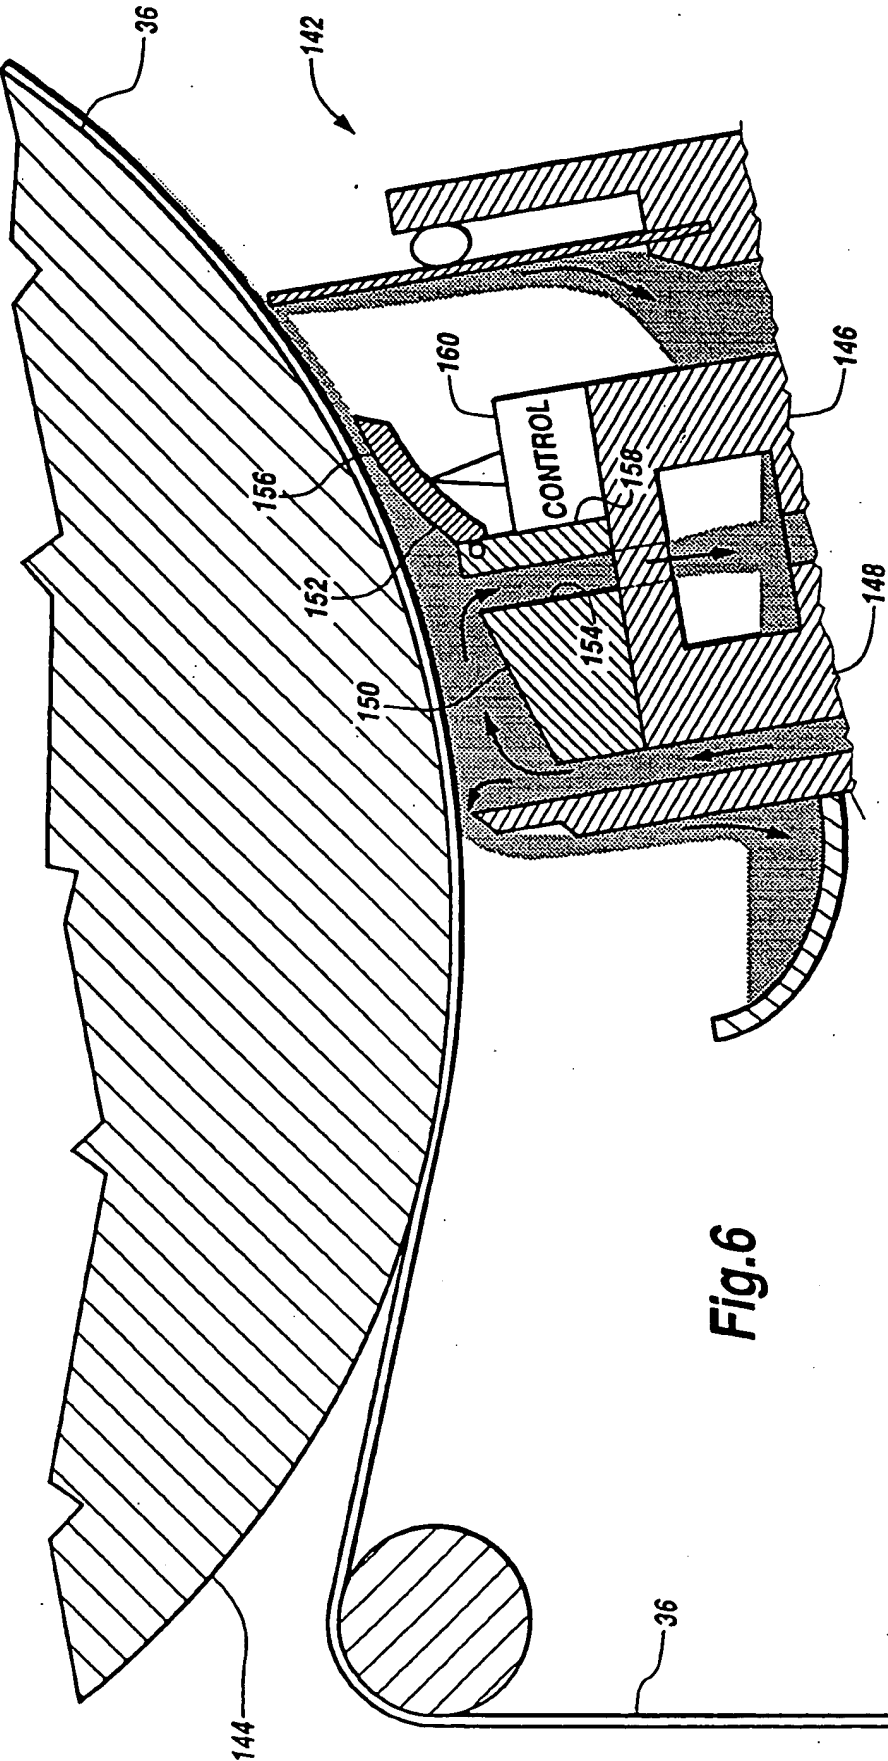

# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/US 96/05445

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 D21H23/32 D21H23/60

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 D21H B05C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,4 558 658 (SOMMER HERBERT ET AL) 17 December 1985 see column 4, line 7 - column 6, line 10; figures 1-3	1,9, 18-21,30
A	see the whole document ---	32
A	US,A,4 964 364 (KAERNAE ANSSI ET AL) 23 October 1990 see the whole document ---	1,10,20, 21
A	EP,A,0 436 172 (MITSUBISHI HEAVY IND LTD) 10 July 1991 see the whole document ---	1,10,20, 21
A	US,A,4 873 939 (ESKELINEN JUHANI) 17 October 1989 ---	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \* "A" document defining the general state of the art which is not considered to be of particular relevance
- \* "E" earlier document but published on or after the international filing date
- \* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \* "O" document referring to an oral disclosure, use, exhibition or other means
- \* "P" document published prior to the international filing date but later than the priority date claimed

- \* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* "A" document member of the same patent family

Date of the actual completion of the international search

25 July 1996

Date of mailing of the international search report

16.08.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+ 31-70) 340-3016

Authorized officer

Nestby, K





# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/US 96/05445

## C(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO,A,95 06164 (BELOIT TECHNOLOGIES INC) 2 March 1995	
A	WO,A,94 02256 (VOITH GMBH J M ;SIEBERTH RALF (US)) 3 February 1994	
A	GB,A,1 229 374 (AGFA-GEVAERT AG) 21 April 1971	
A	DE,A,42 05 993 (JAGENBERG AG) 2 September 1993	
A	US,A,4 009 657 (BONANNO FRANK JOSEPH ET AL) 1 March 1977	

# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/US 96/05445

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4558658	17-12-85	DE-A- 3338324 CA-A- 1203375 EP-A- 0109520 EP-A- 0109521 JP-A- 59154167	24-05-84 22-04-86 30-05-84 30-05-84 03-09-84
US-A-4964364	23-10-90	CA-A- 1312462 DE-A- 3902599 FR-A- 2627785 SE-B- 468275 SE-A- 8900162	12-01-93 03-08-89 01-09-89 07-12-92 18-01-89
EP-A-0436172	10-07-91	DE-D- 69012975 DE-T- 69012975 US-A- 5173120	03-11-94 23-03-95 22-12-92
US-A-4873939	17-10-89	DE-A- 3738658 FR-A- 2606673 GB-A,B 2199516 SE-A- 8704418	26-05-88 20-05-88 13-07-88 15-05-88
WO-A-9506164	02-03-95	CA-A- 2168365 EP-A- 0715667 FI-A- 960837	02-03-95 12-06-96 23-02-96
WO-A-9402256	03-02-94	DE-A- 4224726 CA-A- 2120015 EP-A- 0607398 FI-A- 941410 JP-T- 6511430 US-A- 5454870	03-02-94 03-02-94 27-07-94 25-03-94 22-12-94 03-10-95
GB-A-1229374	21-04-71	NONE	
DE-A-4205993	02-09-93	AT-T- 128501 DE-D- 59203854 WO-A- 9317181 EP-A- 0583434 ES-T- 2080606 JP-T- 6507120	15-10-95 02-11-95 02-09-93 23-02-94 01-02-96 11-08-94

Int. Appl. No.  
PCT/US 96/05445

**PCT/US 96/05445**

US-A-4009657	01-03-77	CA-A-	1044960	26-12-78
--------------	----------	-------	---------	----------

